


TUBULAR TWO-LEVEL EMBEDDED POLE FOR ROADS – type STB A



PRODUCT CODE	TYPE	height above the ground H (m)	total length H _c (m)	anchoring E (m)	diameter D1 (mm)	diameter D2 (mm)	peak tension (N)	weight (kg)	surface (m ²)
1203011476	STB 3 - A	3,0	3,6	0,6	114	76	820	28	1,08
1203511476	STB 3,5 - A	3,5	4,1	0,6	114	76	810	31	1,20
1204011476	STB 4 - A	4,0	4,8	0,8	114	76	800	35	1,39
1204511476	STB 4,5 - A	4,5	5,3	0,8	114	76	790	40	1,57
1205011476	STB 5 - A	5,0	5,8	0,8	114	76	700	44	1,75
1205511476	STB 5,5 - A	5,5	6,3	0,8	114	76	610	47	1,87
1206011476	STB 6 - A	6,0	7,0	1,0	114	76	550	65	2,15
1206511476	STB 6,5 - A	6,5	7,5	1,0	114	76	440	68	2,27
1207011476	STB 7 - A	7,0	8,0	1,0	114	76	395	71	2,39

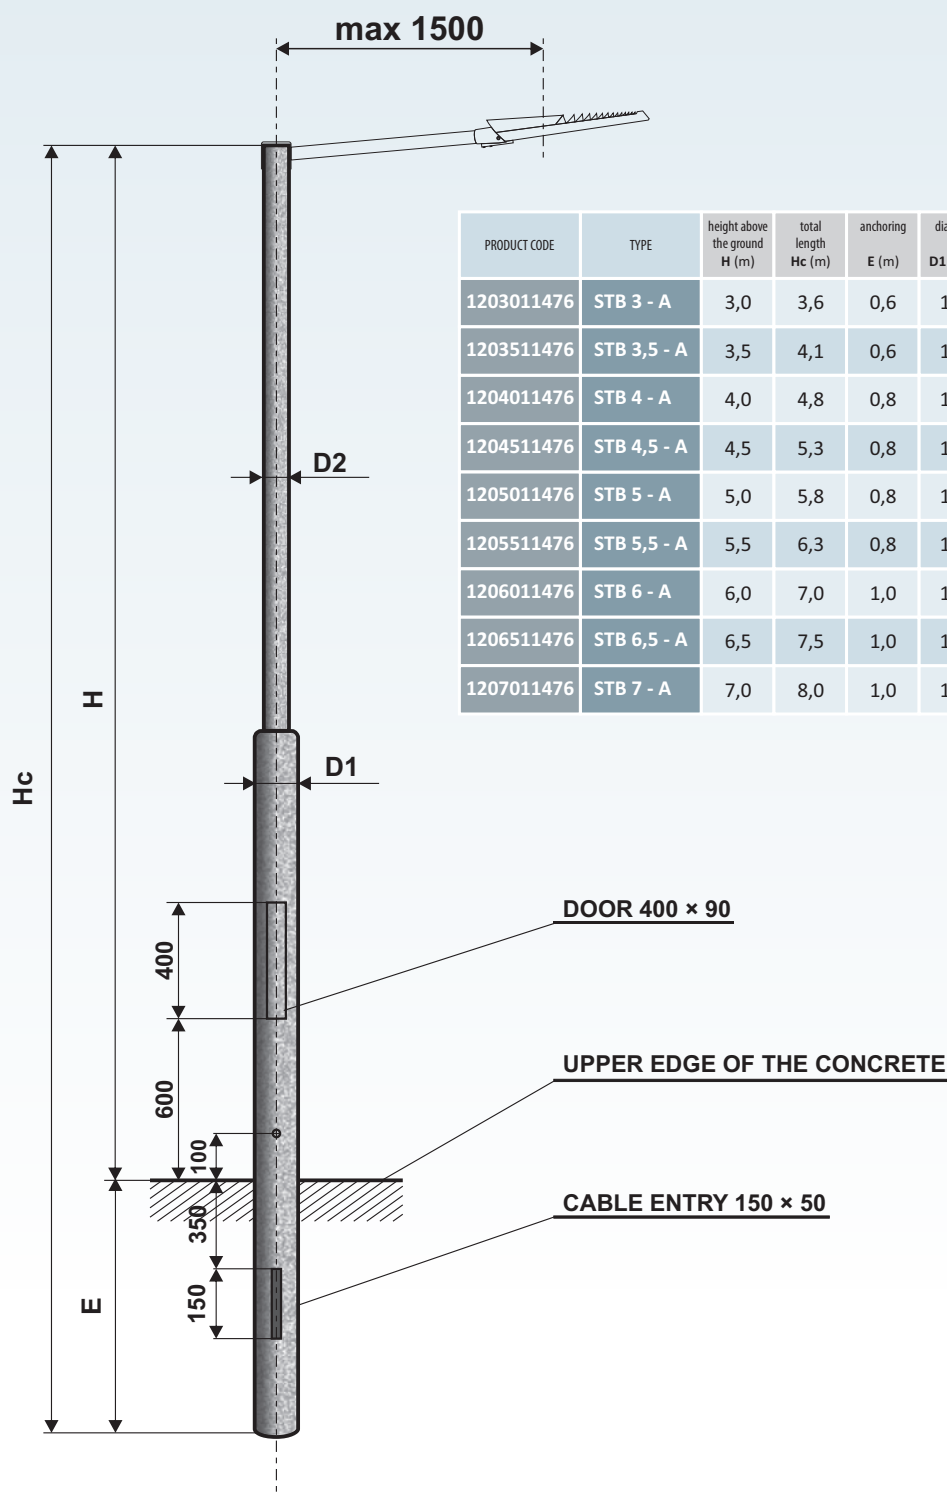

Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 76 mm with outreach up to 1500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.