


TUBULAR THREE-LEVEL EMBEDDED POLE FOR ROADS – type JBUD



PRODUCT CODE	TYPE	height above the ground H (m)	total length H _c (m)	anchoring E (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
1707013389	JBUD 7	7,0	8,5	1,5	133	108	89	1000	87	3,05
1708013389	JBUD 8	8,0	9,5	1,5	133	108	89	1000	94	3,33
1708015989	JBUD 8 ST	8,0	9,5	1,5	159	108	89	1060	104	3,62
1708159114	JBUD 8 T	8,0	9,5	1,5	159	133	114	1050	116	4,09
1709013389	JBUD 9	9,0	10,5	1,5	133	108	89	1000	102	3,67
1709015989	JBUD 9 ST	9,0	10,5	1,5	159	108	89	920	112	3,96
1709159114	JBUD 9 T	9,0	10,5	1,5	159	133	114	900	126	4,51
1710013389	JBUD 10 L	10,0	11,5	1,5	133	108	89	860	129	4,09
1710015989	JBUD 10	10,0	11,5	1,5	159	108	89	820	142	4,46
1710159114	JBUD 10 T	10,0	11,5	1,5	159	133	114	810	151	5,01
1711015989	JBUD 11	11,0	12,5	1,5	159	108	89	805	152	4,80
1711159114	JBUD 11 T	11,0	12,5	1,5	159	133	114	795	161	5,43
1712015989	JBUD 12 DD	12,0	13,5	1,5	159	133	89	790	173	5,69
1712159114	JBUD 12 T DD	12,0	13,5	1,5	159	133	114	780	179	5,93
1713159114	JBUD 13 T DD	13,0	14,5	1,5	159	133	114	775	179	6,34
1714159114	JBUD 14 T DD	14,0	15,5	1,5	159	133	114	770	259	6,70

DD ... two piece

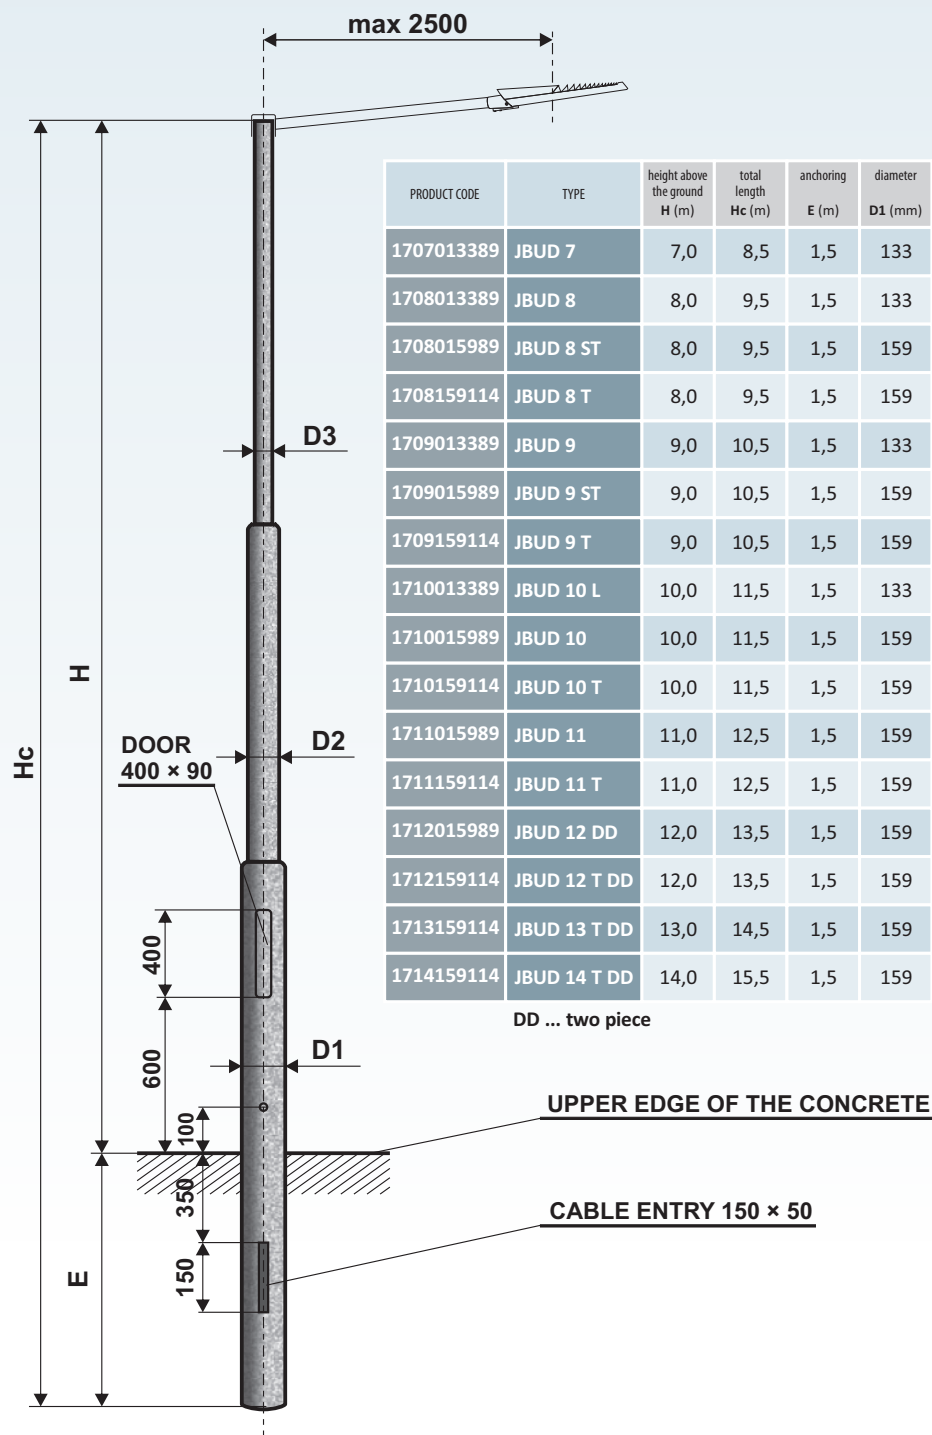

Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets:
UD diameter 89 with outreach up to 2500 mm
UD diameter 114 with outreach up to 3000 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.