


TUBULAR THREE-LEVEL EMBEDDED CAMERA POLE – type CP

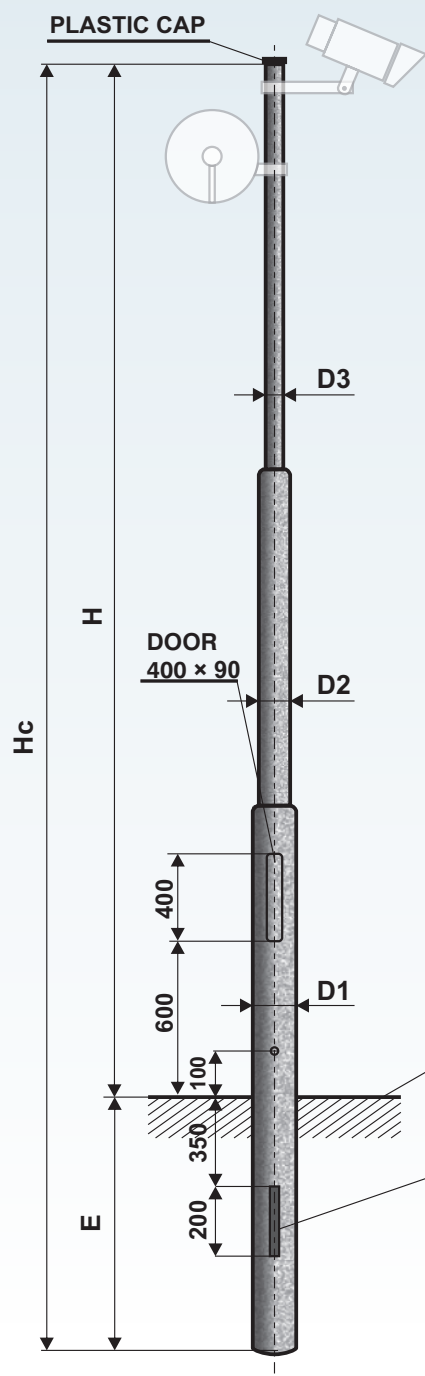

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	anchoring E (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
3500000003	CP 3	3,0	3,6	0,6	159	114	89	690	48	1,51
3500000004	CP 4	4,0	4,8	0,8	159	114	89	678	62	1,93
3500000005	CP 5	5,0	6,0	1,0	159	114	89	660	87	2,41
3500000006	CP 6	6,0	7,0	1,0	159	114	89	652	94	2,69
3500000007	CP 7	7,0	8,0	1,0	159	133	114	2250	114	3,49
3500000008	CP 8	8,0	9,0	1,0	159	133	114	2050	127	3,88
3500000009	CP 9	9,0	10,2	1,2	159	133	114	1830	156	4,40
3500000010	CP 10	10,0	11,2	1,2	219	159	114	1600	242	5,69
3500000011	CP 11	11,0	12,5	1,5	219	159	114	1510	272	6,39
3500000012	CP 12 DD	12,0	13,5	1,5	219	159	114	1450	284	6,75

DD ... two piece

CP type poles can be equipped with cameras, weather stations, satellites and antennas.

The plastic cap is not a part of the pole and must be ordered as a separate item from page 83.

UPPER EDGE OF THE CONCRETE

CABLE ENTRY 200 x 50



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating