



TUBULAR THREE-LEVEL FLANGE POLE – type LBH B P

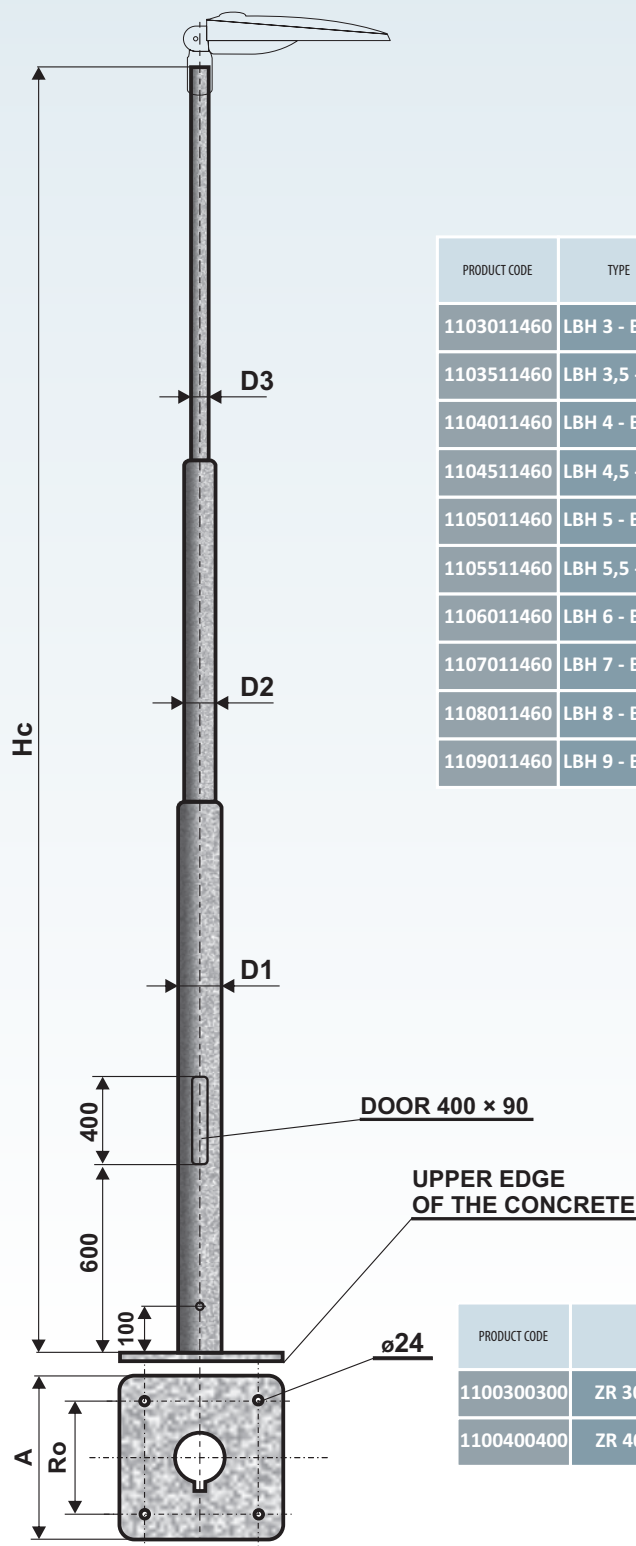

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
1103011460	LBH 3 - B P	3,0	3,0	114	76	60	450	28	0,91
1103511460	LBH 3,5 - B P	3,5	3,5	114	76	60	450	30	1,00
1104011460	LBH 4 - B P	4,0	4,0	114	76	60	300	34	1,15
1104511460	LBH 4,5 - B P	4,5	4,5	114	76	60	300	36	1,21
1105011460	LBH 5 - B P	5,0	5,0	114	76	60	200	38	1,33
1105511460	LBH 5,5 - B P	5,5	5,5	114	76	60	200	41	1,45
1106011460	LBH 6 - B P	6,0	6,0	114	76	60	200	46	1,66
1107011460	LBH 7 - B P	7,0	7,0	114	76	60	250	64	1,97
1108011460	LBH 8 - B P	8,0	8,0	114	89	60	250	77	2,28
1109011460	LBH 9 - B P	9,0	9,0	114	89	60	245	89	2,64

GRILLAGE BASE – type ZR 300 LBH B P ZR 400 LBH B P

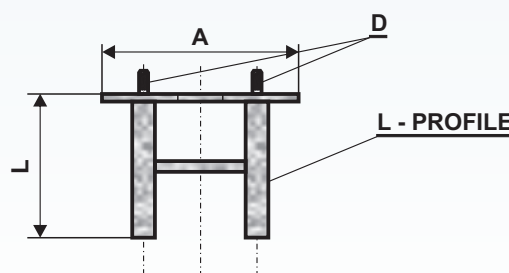

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
1100300300	ZR 300 LBH B P	300	240	500	M20	10,0	0,40	3 – 6
1100400400	ZR 400 LBH B P	400	300	600	M20	20,0	0,60	7 – 9



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 60 mm with outreach up to 500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.