



TUBULAR TWO-LEVEL FLANGE POLE FOR ROADS – type STB A P

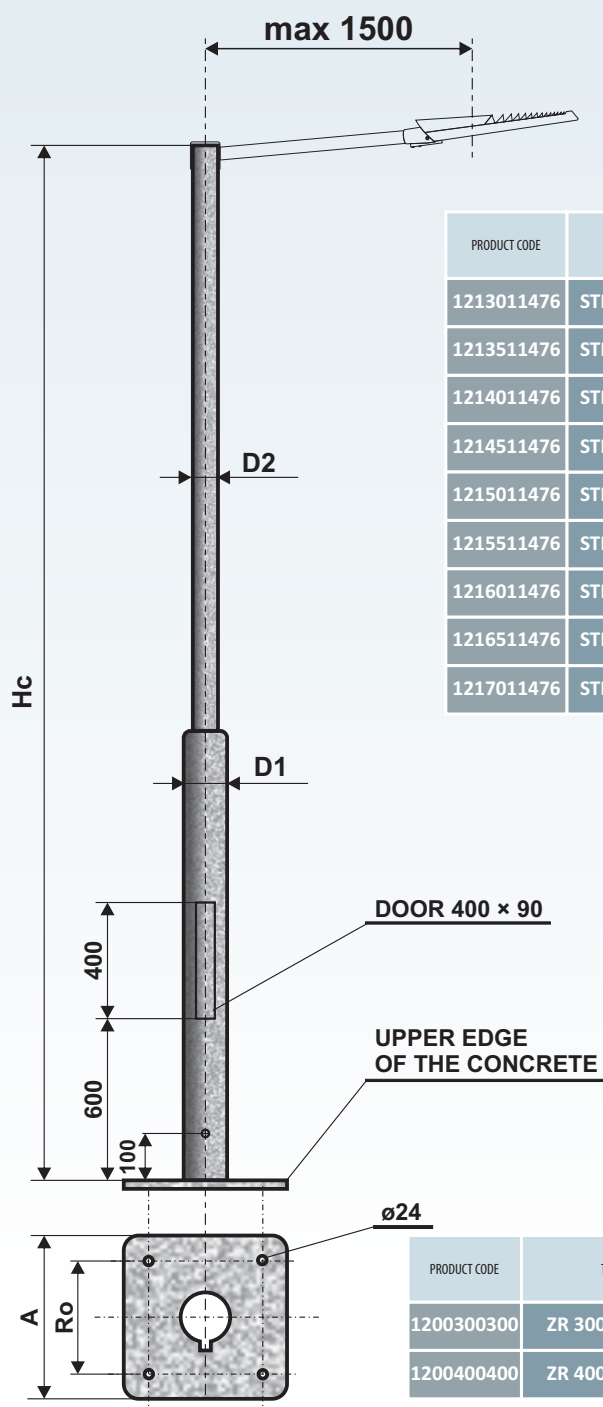

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	peak tension (N)	weight (kg)	surface (m ²)
1213011476	STB 3 - A P	3,0	3,0	114	76	820	29	0,94
1213511476	STB 3,5 - A P	3,5	3,5	114	76	810	32	1,06
1214011476	STB 4 - A P	4,0	4,0	114	76	800	35	1,18
1214511476	STB 4,5 - A P	4,5	4,5	114	76	790	39	1,36
1215011476	STB 5 - A P	5,0	5,0	114	76	700	44	1,54
1215511476	STB 5,5 - A P	5,5	5,5	114	76	610	46	1,66
1216011476	STB 6 - A P	6,0	6,0	114	76	550	60	1,87
1216511476	STB 6,5 - A P	6,5	6,5	114	76	440	75	2,06
1217011476	STB 7 - A P	7,0	7,0	114	76	395	78	2,18

GRILLAGE BASE – type ZR 300 STB A P
ZR 400 STB A P

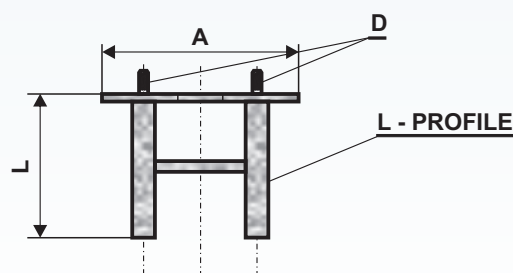

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
1200300300	ZR 300 STB A P	300	240	500	M20	10,0	0,40	3 – 6,5
1200400400	ZR 400 STB A P	400	300	600	M20	20,0	0,60	7



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 76 mm with outreach up to 1500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.