


TUBULAR TWO-LEVEL EMBEDDED POLE – type LBH A

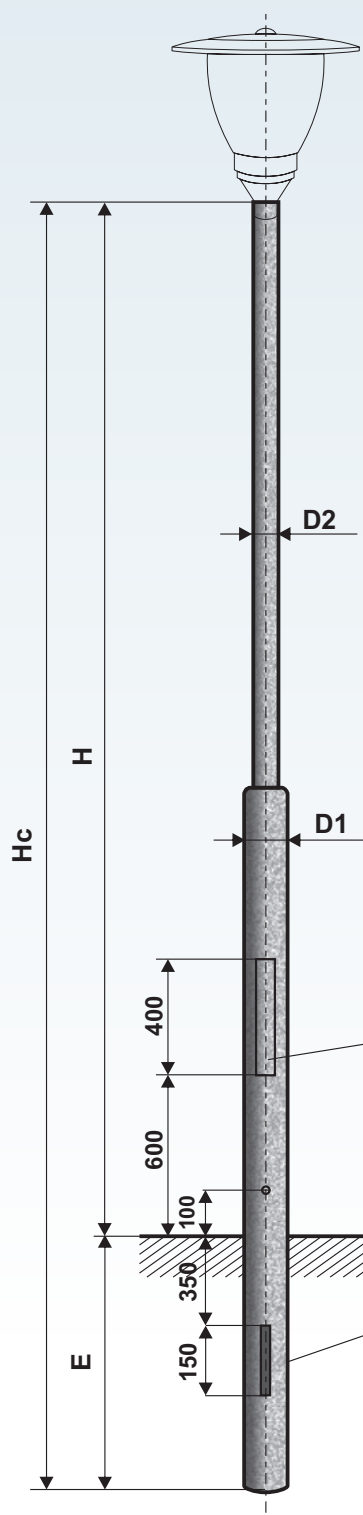

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	anchoring E (m)	diameter D1 (mm)	diameter D2 (mm)	peak tension (N)	weight (kg)	surface (m ²)
0102010860	LBH 2 - A	2,0	2,6	0,6	108	60	530	20	0,75
0102510860	LBH 2,5 - A	2,5	3,1	0,6	108	60	525	22	0,84
0103010860	LBH 3 - A	3,0	3,6	0,6	108	60	520	25	0,98
0103510860	LBH 3,5 - A	3,5	4,1	0,6	108	60	500	28	1,08
0104010860	LBH 4 - A	4,0	4,6	0,6	108	60	490	30	1,17
0104510860	LBH 4,5 - A	4,5	5,3	0,8	108	60	450	35	1,38
0105010860	LBH 5 - A	5,0	5,8	0,8	108	60	410	39	1,55
0105510860	LBH 5,5 - A	5,5	6,3	0,8	108	60	390	42	1,69
0106010860	LBH 6 - A	6,0	6,8	0,8	108	60	350	47	1,89

DOOR 400 × 90

UPPER EDGE OF THE CONCRETE

CABLE ENTRY 150 × 50



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 60 mm
with outreach up to 500 mm

Number of arms and their length is dependent
on the pole's height and load carrying capacity.