



TUBULAR TWO-LEVEL FLANGE POLE – type KK P

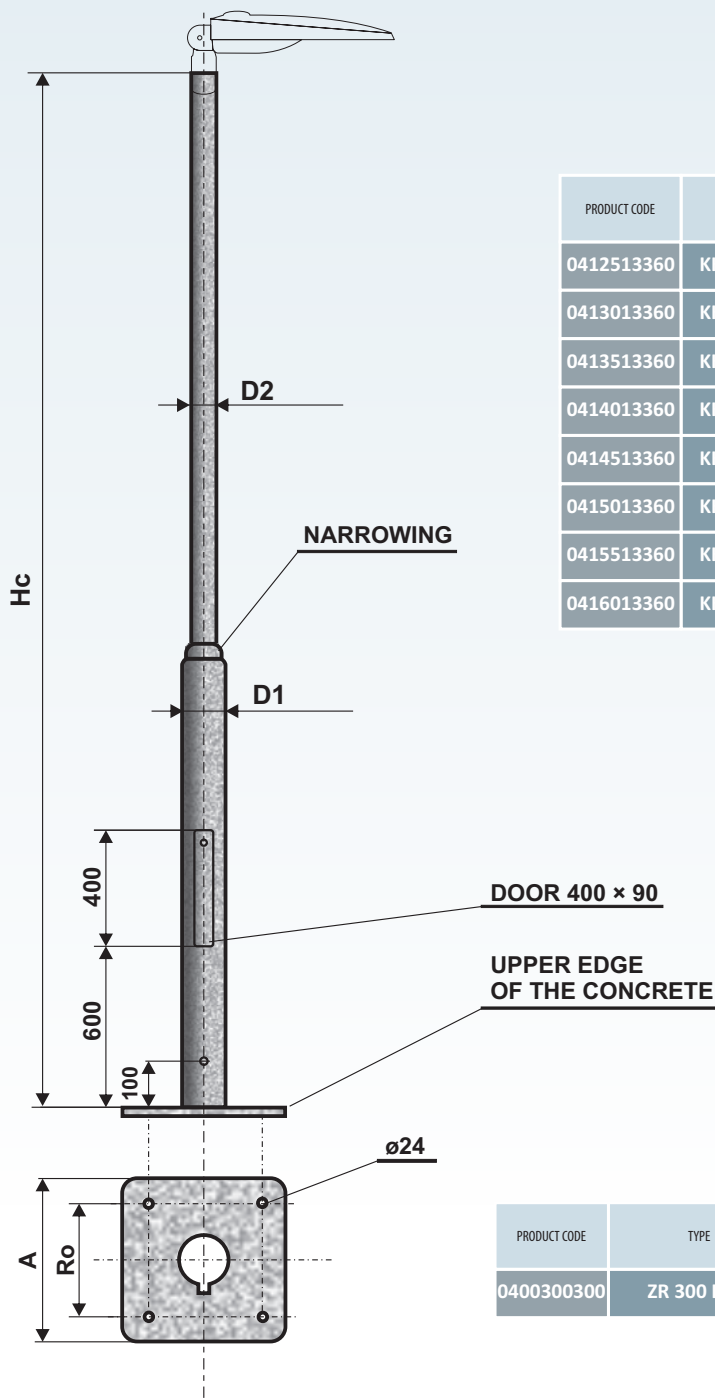

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	peak tension (N)	weight (kg)	surface (m ²)
0412513360	KK 2,5 P	2,5	2,5	133	60	300	27	0,84
0413013360	KK 3 P	3,0	3,0	133	60	300	29	0,93
0413513360	KK 3,5 P	3,5	3,5	133	60	260	31	1,03
0414013360	KK 4 P	4,0	4,0	133	60	260	33	1,12
0414513360	KK 4,5 P	4,5	4,5	133	60	250	36	1,22
0415013360	KK 5 P	5,0	5,0	133	60	200	38	1,31
0415513360	KK 5,5 P	5,5	5,5	133	60	200	46	1,63
0416013360	KK 6 P	6,0	6,0	133	60	200	48	1,73

GRILLAGE BASE – type ZR 300 KK P

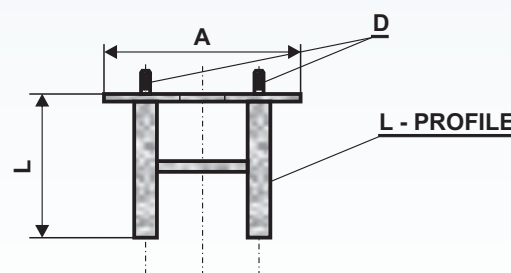

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
0400300300	ZR 300 KK P	300	240	500	M20	10,0	0,40	2,5 – 6



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 60 mm with outreach up to 500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.