



TUBULAR THREE-LEVEL FLANGE POLE – type KL P

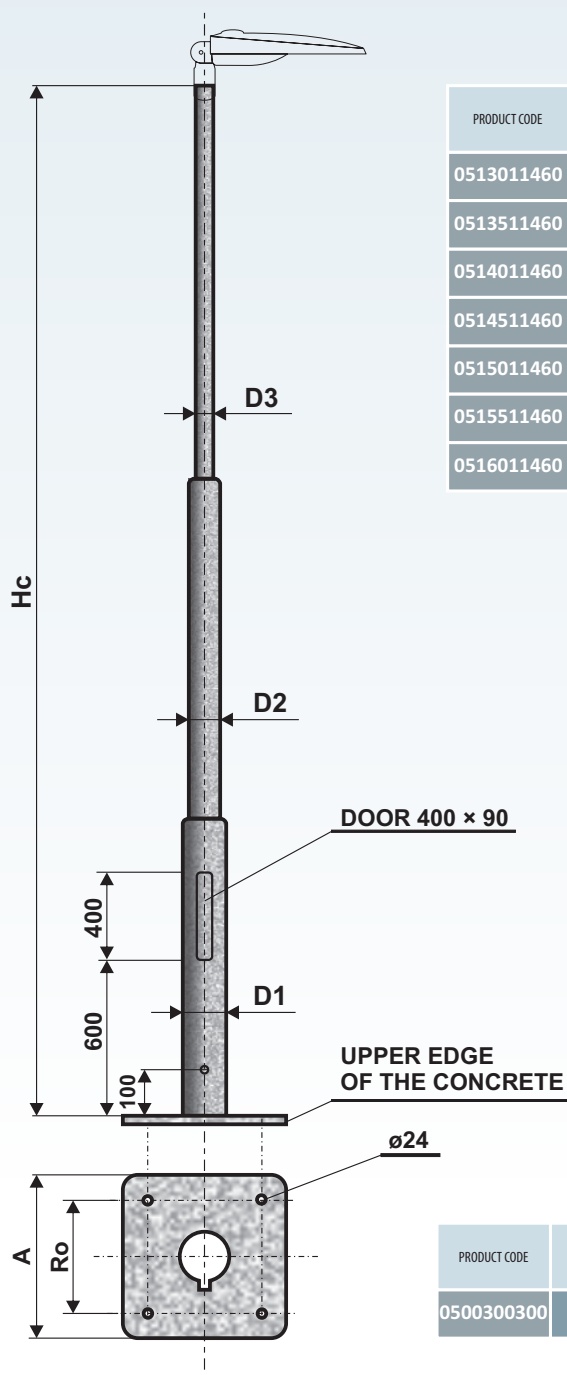

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
0513011460	KL 3 P	2,6	2,6	114	89	60	400	29	0,93
0513511460	KL 3,5 P	3,1	3,1	114	89	60	400	31	1,03
0514011460	KL 4 P	3,6	3,6	114	89	60	390	34	1,17
0514511460	KL 4,5 P	4,1	4,1	114	89	60	355	38	1,30
0515011460	KL 5 P	4,6	4,6	114	89	60	315	40	1,41
0515511460	KL 5,5 P	5,1	5,1	114	89	60	275	42	1,50
0516011460	KL 6 P	5,6	5,6	114	89	60	235	45	1,60

GRILLAGE BASE – type ZR 300 KL P

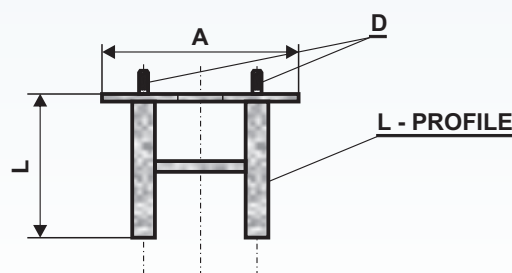

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
0500300300	ZR 300 KL P	300	240	500	M20	10,0	0,40	3 – 6



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 60 mm with outreach up to 500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.