


TUBULAR TWO-LEVEL EMBEDDED POLE FOR ROADS – type LPH



PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	anchoring E (m)	diameter D1 (mm)	diameter D2 (mm)	peak tension (N)	weight (kg)	surface (m ²)
1406011476	LPH 6	4,2	5,2	1,0	114	76	365	46	1,54
1406013389	LPH 6 Z	4,2	5,2	1,0	133	89	430	54	1,81
1407011476	LPH 7	5,2	6,2	1,0	114	76	390	55	1,84
1407013389	LPH 7 Z	5,2	6,2	1,0	133	89	455	61	2,02
1408013389	LPH 8	6,2	7,4	1,2	133	89	480	82	2,49
1409013389	LPH 9	7,2	8,4	1,2	133	89	395	97	2,91
1410013389	LPH 10	8,2	9,7	1,5	133	89	300	119	3,51

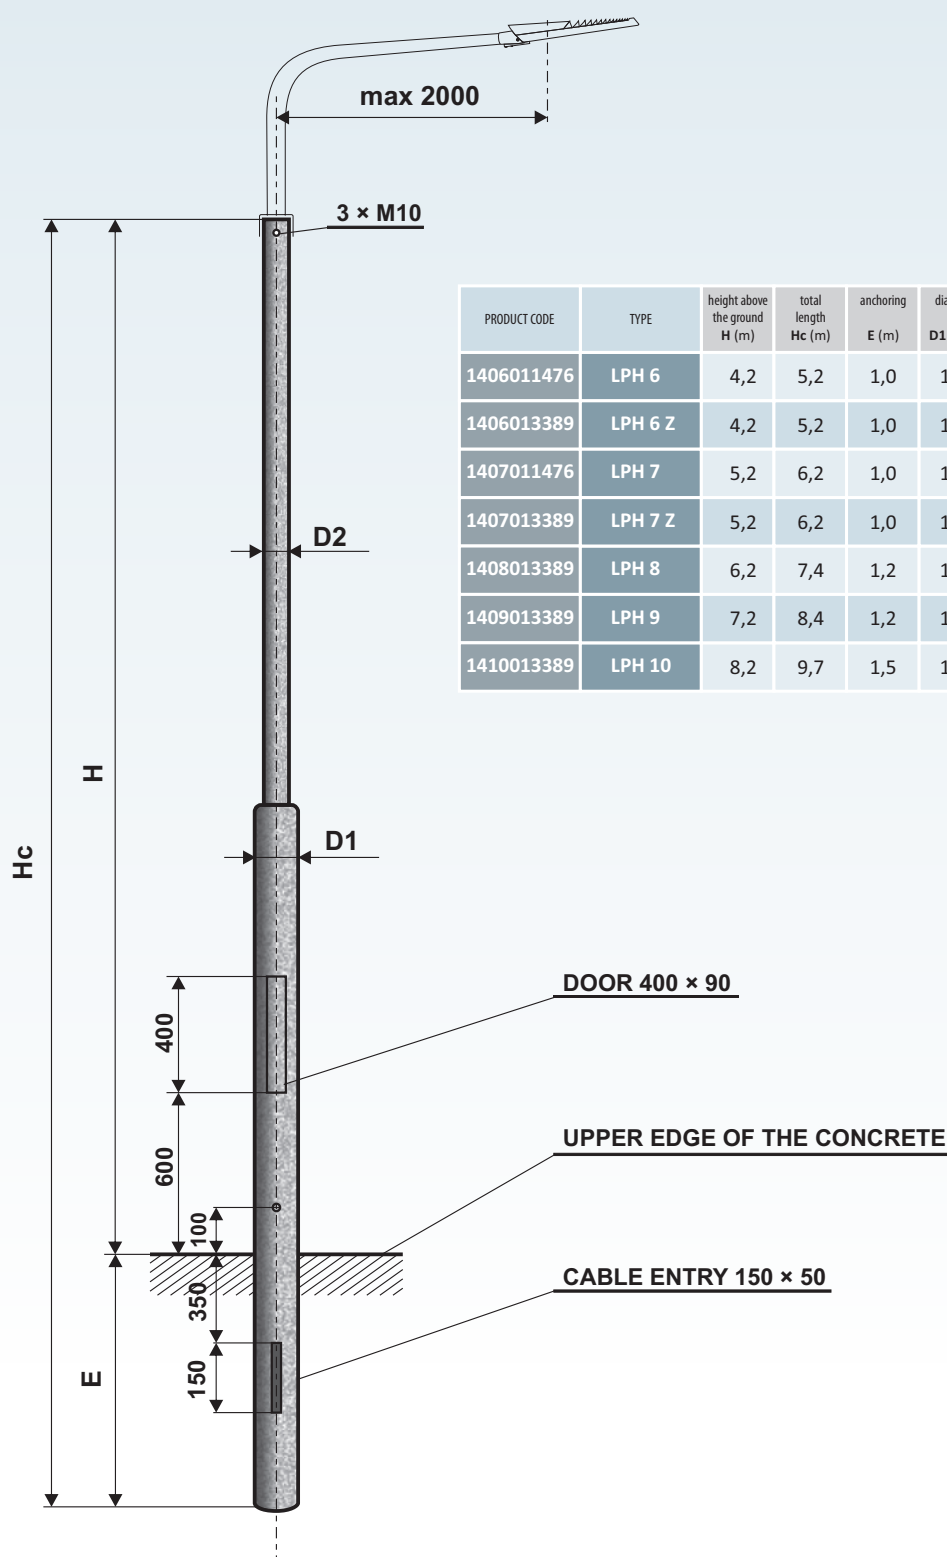

Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 76 / 89 mm with outreach up to 2000 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.