



TUBULAR THREE-LEVEL FLANGE POLE FOR ROADS – type STB B P

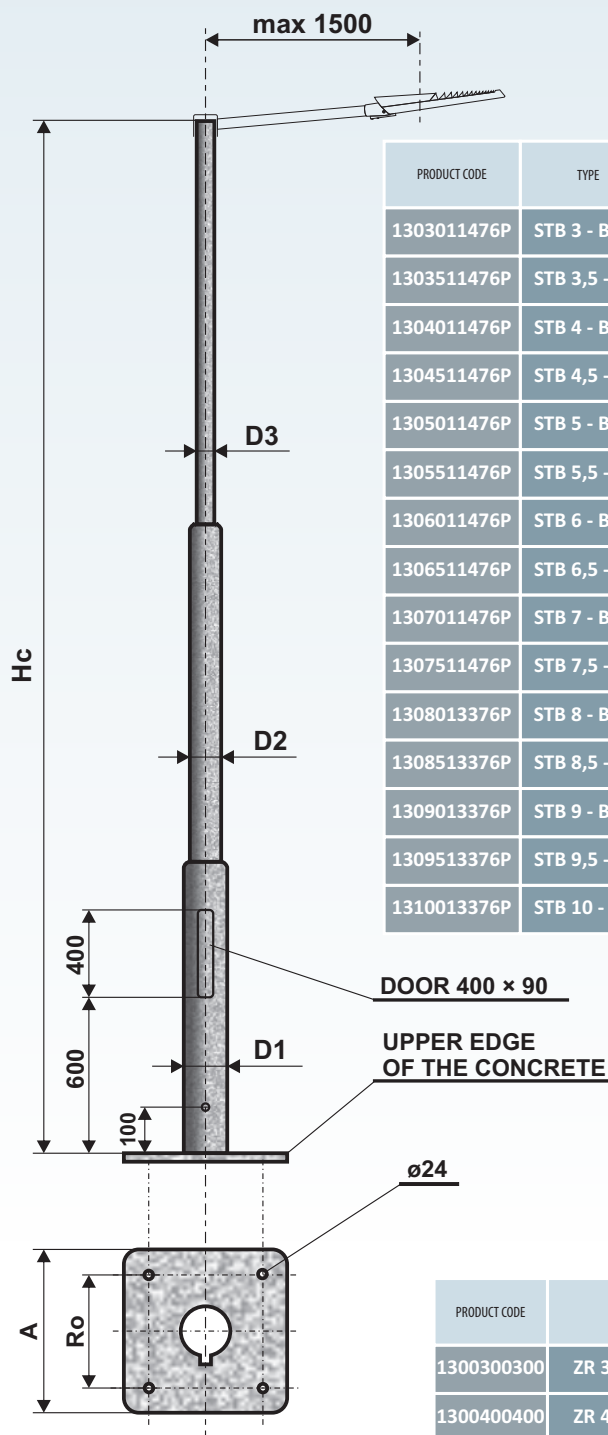

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
1303011476P	STB 3 - B P	3,0	3,0	114	89	76	380	30	0,99
1303511476P	STB 3,5 - B P	3,5	3,5	114	89	76	375	34	1,13
1304011476P	STB 4 - B P	4,0	4,0	114	89	76	370	37	1,26
1304511476P	STB 4,5 - B P	4,5	4,5	114	89	76	365	40	1,38
1305011476P	STB 5 - B P	5,0	5,0	114	89	76	360	43	1,50
1305511476P	STB 5,5 - B P	5,5	5,5	114	89	76	355	46	1,64
1306011476P	STB 6 - B P	6,0	6,0	114	89	76	350	56	1,84
1306511476P	STB 6,5 - B P	6,5	6,5	114	89	76	380	72	2,05
1307011476P	STB 7 - B P	7,0	7,0	114	89	76	300	75	2,19
1307511476P	STB 7,5 - B P	7,5	7,5	114	89	76	290	78	2,31
1308013376P	STB 8 - B P	8,0	8,0	133	102	76	280	91	2,67
1308513376P	STB 8,5 - B P	8,5	8,5	133	102	76	260	94	2,79
1309013376P	STB 9 - B P	9,0	9,0	133	102	76	255	106	3,09
1309513376P	STB 9,5 - B P	9,5	9,5	133	102	76	250	109	3,21
1310013376P	STB 10 - B P	10,0	10,0	133	102	76	250	121	3,51

GRILLAGE BASE – type ZR STB 300 B P ZR STB 400 B P

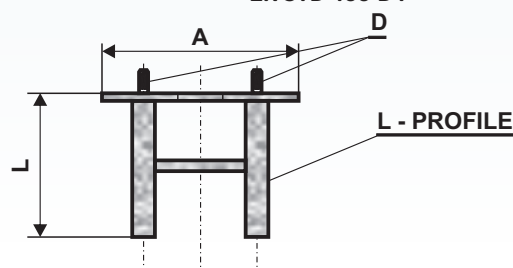

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
1300300300	ZR 300 STB B P	300	240	500	M20	10,0	0,40	3 – 6,5
1300400400	ZR 400 STB B P	400	300	600	M20	20,0	0,60	7 – 10



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 76 mm with outreach up to 1500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.