



TUBULAR FOUR-LEVEL FLANGE POLE FOR HIGHWAYS – type JBUD DD P

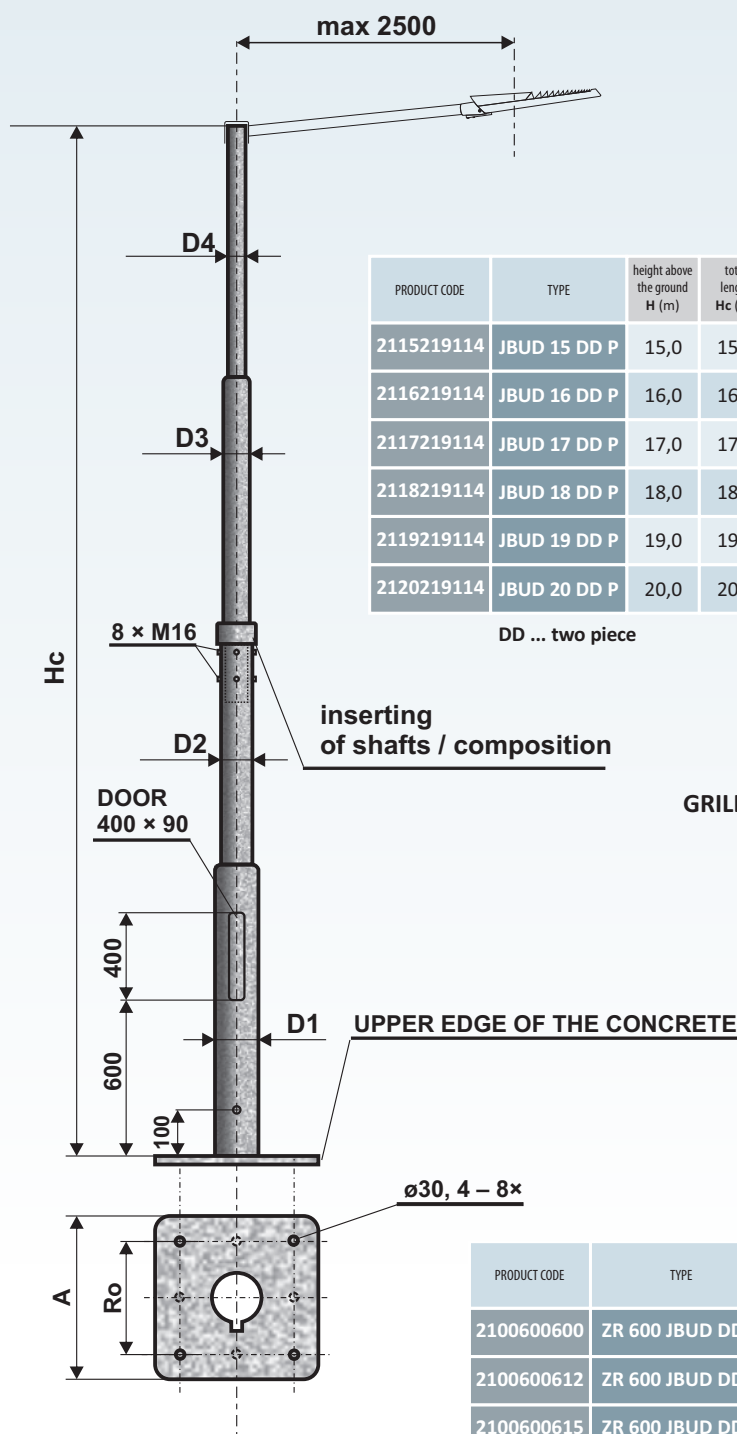

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	diameter D4 (mm)	peak tension (N)	weight (kg)	surface (m ²)
2115219114	JBUD 15 DD P	15,0	15,0	219	159	133	114	1150	374	7,91
2116219114	JBUD 16 DD P	16,0	16,0	219	159	133	114	1050	428	8,49
2117219114	JBUD 17 DD P	17,0	17,0	219	159	133	114	1025	436	8,84
2118219114	JBUD 18 DD P	18,0	18,0	219	159	133	114	1000	448	9,20
2119219114	JBUD 19 DD P	19,0	19,0	219	168	133	114	1150	461	9,62
2120219114	JBUD 20 DD P	20,0	20,0	219	168	133	114	1240	475	10,04

DD ... two piece

GRILLAGE BASE type ZR 600/1000 JBUD DD P
 ZR 600/1200 JBUD DD P
 ZR 600/1500 JBUD DD P

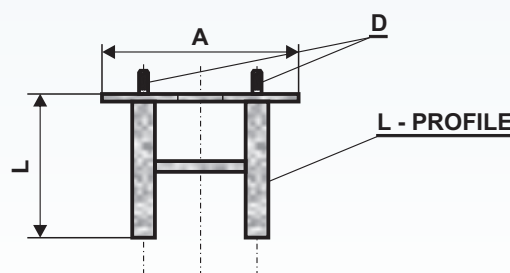

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
2100600600	ZR 600 JBUD DD P	600	500	1000	M24	55,0	1,40	15 – 16
2100600612	ZR 600 JBUD DD P	600	500	1200	M24	57,0	1,50	17 – 18
2100600615	ZR 600 JBUD DD P	600	500	1500	M24	59,0	1,60	19 – 20



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: UD diameter 114 mm with outreach up to 2500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.