


TUBULAR THREE-LEVEL EMBEDDED POLE – type KL



PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	anchoring E (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
0503011460	KL 3	2,6	3,2	0,6	114	89	60	400	29	1,11
0503511460	KL 3,5	3,1	3,7	0,6	114	89	60	400	31	1,20
0504011460	KL 4	3,6	4,4	0,8	114	89	60	390	36	1,42
0504511460	KL 4,5	4,1	4,9	0,8	114	89	60	355	40	1,56
0505011460	KL 5	4,6	5,4	0,8	114	89	60	315	42	1,67
0505511460	KL 5,5	5,1	5,9	0,8	114	89	60	275	44	1,76
0506011460	KL 6	5,6	6,4	0,8	114	89	60	235	47	1,86

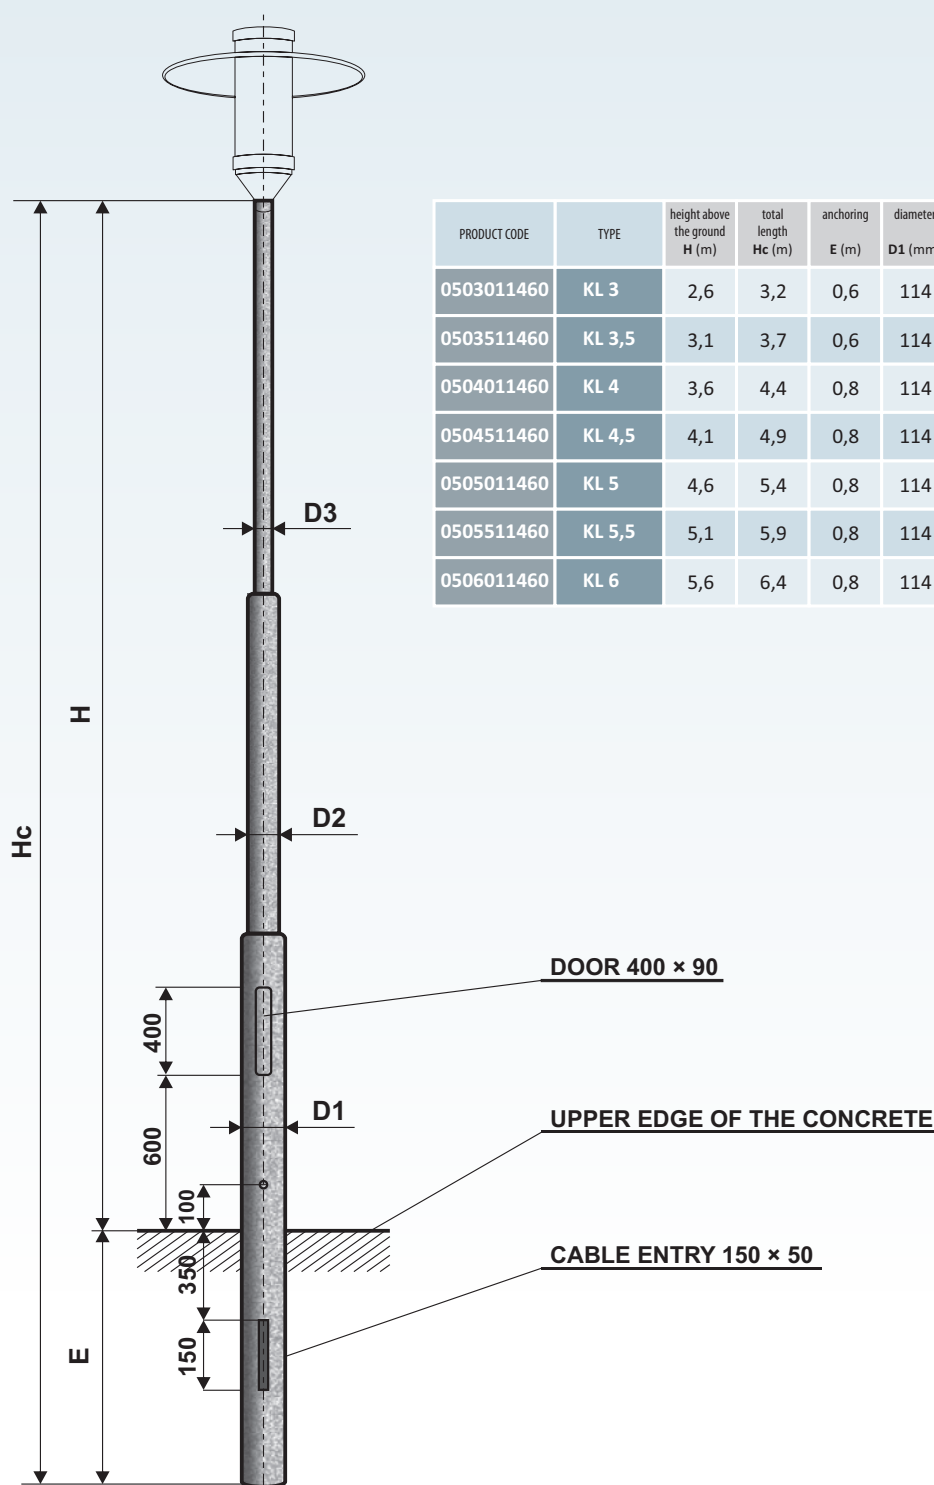

Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets: SK, SV, UD diameter 60 mm with outreach up to 500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.