



TUBULAR THREE-LEVEL FLANGE POLE FOR ROADS – type JB P

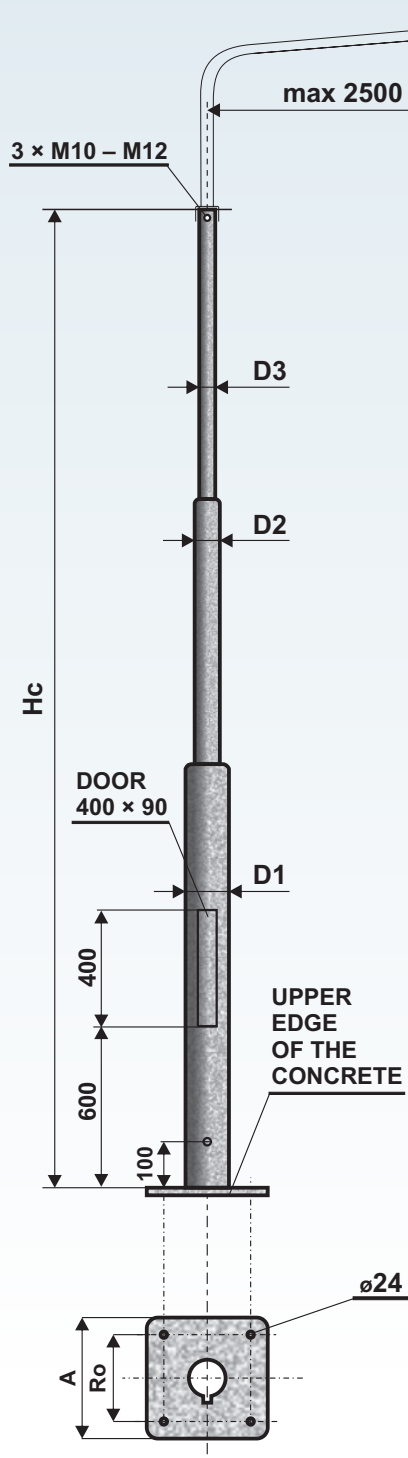

PRODUCT CODE	TYPE	height above the ground H (m)	total length Hc (m)	diameter D1 (mm)	diameter D2 (mm)	diameter D3 (mm)	peak tension (N)	weight (kg)	surface (m ²)
2008013376	JB 8 P	6,2	6,2	133	102	76	656	60	2,04
2008013389	JB 8 S P	6,2	6,2	133	108	89	654	65	2,18
2008015989	JB 8 ST P	6,2	6,2	159	108	89	652	70	2,29
2008159144	JB 8 T P	6,2	6,2	159	133	114	650	79	2,66
2009013376	JB 9 P	7,2	7,2	133	102	76	648	65	2,28
2009013389	JB 9 S P	7,2	7,2	133	108	89	646	71	2,49
2009015989	JB 9 ST P	7,2	7,2	159	108	89	645	76	2,57
2009159114	JB 9 T P	7,2	7,2	159	133	114	642	88	3,02
2010013389	JB 10 L P	8,2	8,2	133	108	89	640	89	2,82
2010015989	JB 10 P	8,2	8,2	159	108	89	625	95	3,00
2010159114	JB 10 T P	8,2	8,2	159	133	114	620	103	3,48
2011015989	JB 11 P	9,2	9,2	159	114	89	610	116	3,56
2011159114	JB 11 T P	9,2	9,2	159	133	114	608	130	3,89
2012015989	JB 12 P	10,2	10,2	159	114	89	590	135	4,06
2012159114	JB 12 T P	10,2	10,2	159	133	114	585	155	4,39
2013015989	JB 13 P	11,2	11,2	159	114	89	385	174	4,42
2013159114	JB 13 T P	11,2	11,2	159	133	114	400	181	4,89
2014015989	JB 14 P	12,2	12,2	159	114	89	365	185	4,77
2014159114	JB 14 T P	12,2	12,2	159	133	114	390	193	5,31

GRILLAGE BASE – type ZR 400 JB P ZR 400 JB P/800

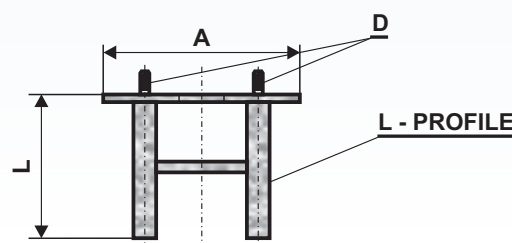

PRODUCT CODE	TYPE	A (mm)	Ro (mm)	L (mm)	D (mm)	weight (kg)	surface (m ²)	Hc (m)
2000400400	ZR 400 JB P	400	300	600	M20	20,0	0,70	6 – 10
2800400400	ZR 400 JB P/800	400	300	800	M20	22,0	0,80	11 – 12



Steel poles are made from quality steel tubes according to the European norm EN 40-5.



- hot dip galvanized according to CSN EN ISO 1461
- hot dip galvanized + powder coating or colour coating according to RAL, AKZO scale
- hot dip galvanized + thermoplastic powder coating



Brackets:

V, UD diameter 76 with outreach up to 1500 mm

V, UD diameter 89 with outreach up to 2000 mm

V, UD diameter 114 with outreach up to 2500 mm

Number of arms and their length is dependent on the pole's height and load carrying capacity.